




Standard Knapp


TRITIUM™ Multipacker

The newest addition to the world of multipacking is our new Standard-Knapp **Tritium™ Multipacker**.

Featuring modular construction and a high-efficiency heat tunnel, our multipacker arranges and neatly wraps bundles of product, producing outstanding bull's eyes to ensure that your message gets conveyed properly every time. Tritium™ is our new family of continuous-motion Tray/Shrink systems, and it represents a leap forward in the design and assembly of packaging machines.

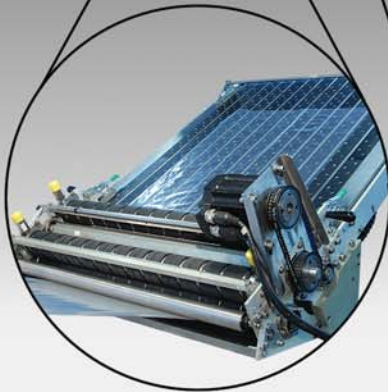

Our new **Servo-driven Film Cutting Knife** enables the Tritium™ Multipacker to cut the film faster and with more precision than ever before. Film cut speeds are no longer determined by film feed speeds, ensuring that a good clean cut is made every time. Access to the knife and film bed area is improved with our maintenance-friendly Slide-out Film Bed.

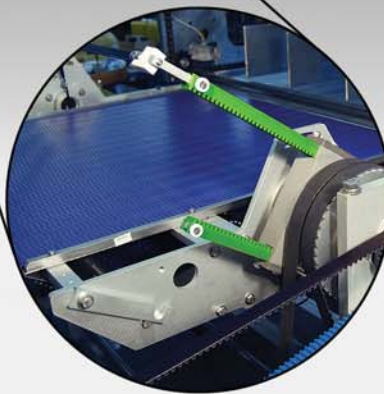

The multi-axis technology in our new **Robo-Wand™** offers limitless wrapping possibilities. The wrapping wand no longer follows a set path and is programmable to new shapes and sizes, with or without trays. As the market drives new applications, the Tritium™ Multipacker with Robo-Wand™ wrapping technology stays flexible and competitive!




Our **Intuitive Operator Interface** is easy to learn and easy to use. The simplified custom graphics allow users of any skill level to understand and operate the machine quickly. Fault recovery is aided by on-screen prompts to ensure high uptime.

Consistent Bull's Eye and Bottom Seals



TRITIUM™ Floor Plans

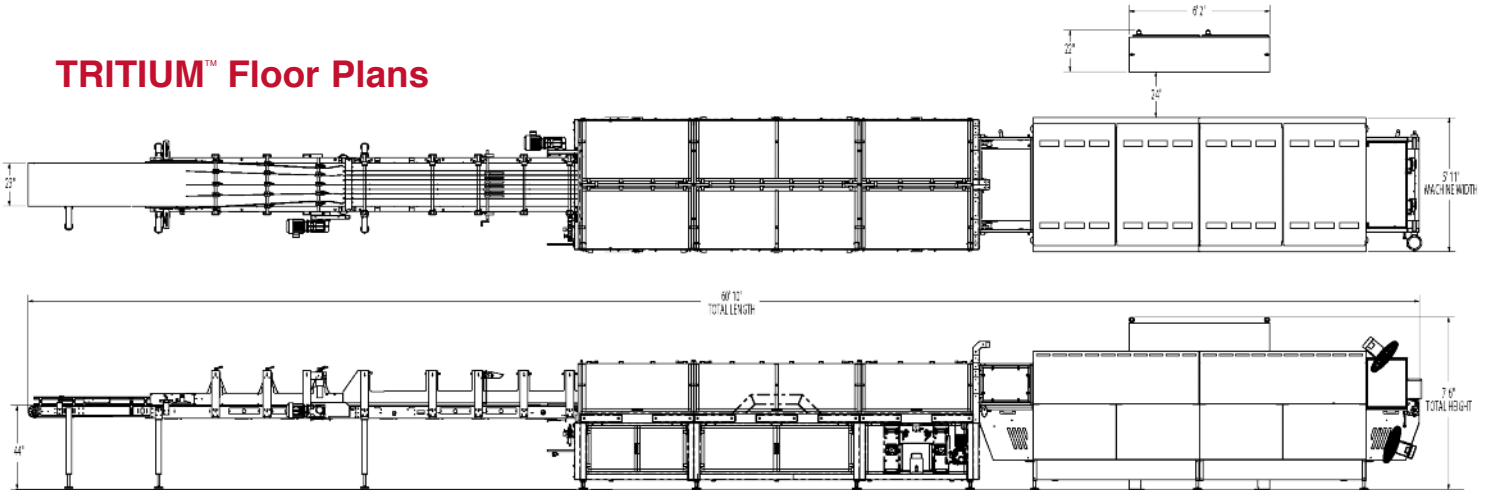

TRITIUM™ Multipacker Standard Features*

Model:	Tritium Multipacker™	Industries Served:	Food, beverage, personal care
Speeds:	Up to 120 packs per minute (1 Track) Up to 360 packs per minute (3 Track)	Controls:	Allen-Bradley ControlLogix
Infeed Style:	Butt Connect or available Side Sweep onto 5' infeed extension	Main Control Panel:	Nema 12, Machine/Boom Mounted
Product Infeed Chain:	Intralox Series 900	Interface:	Allen-Bradley PanelView 1000 Plus
Product Lanes:	1 – 8	Electrical Supply:	460V – 60 HZ – 3 Phase
Product Range:	2" – 7" dia.	Air Supply:	80 PSI
Multipack Range:	2 X 1 – 8 X 4**	Lubrication:	Clustered
Max. Film Roll Diameter:	20"	Servo Controller:	Allen-Bradley Kinetix 6000
Max. Film Roll Width:	34"	VFD Controller:	Allen-Bradley Powerflex 40P VFD

* Standard-Knapp is committed to continuous product improvement. Specifications are subject to change without notice.

** Pack patterns vary for different product sizes.

Optional Feature – Side Load Film Stand



Standard Knapp

© Copyright 2010 Standard-Knapp, Inc. – 0909-300

STANDARD-KNAPP, INC.

63 Pickering Street, Portland, CT 06480 U.S.A.

SALES PHONE: (860) 342-1100, ext. 239

SALES FAX: (860) 342-1557

EMAIL: info@standard-knapp.com

WEB SITE: www.standard-knapp.com